



GOODSLIFT DL4 SPB

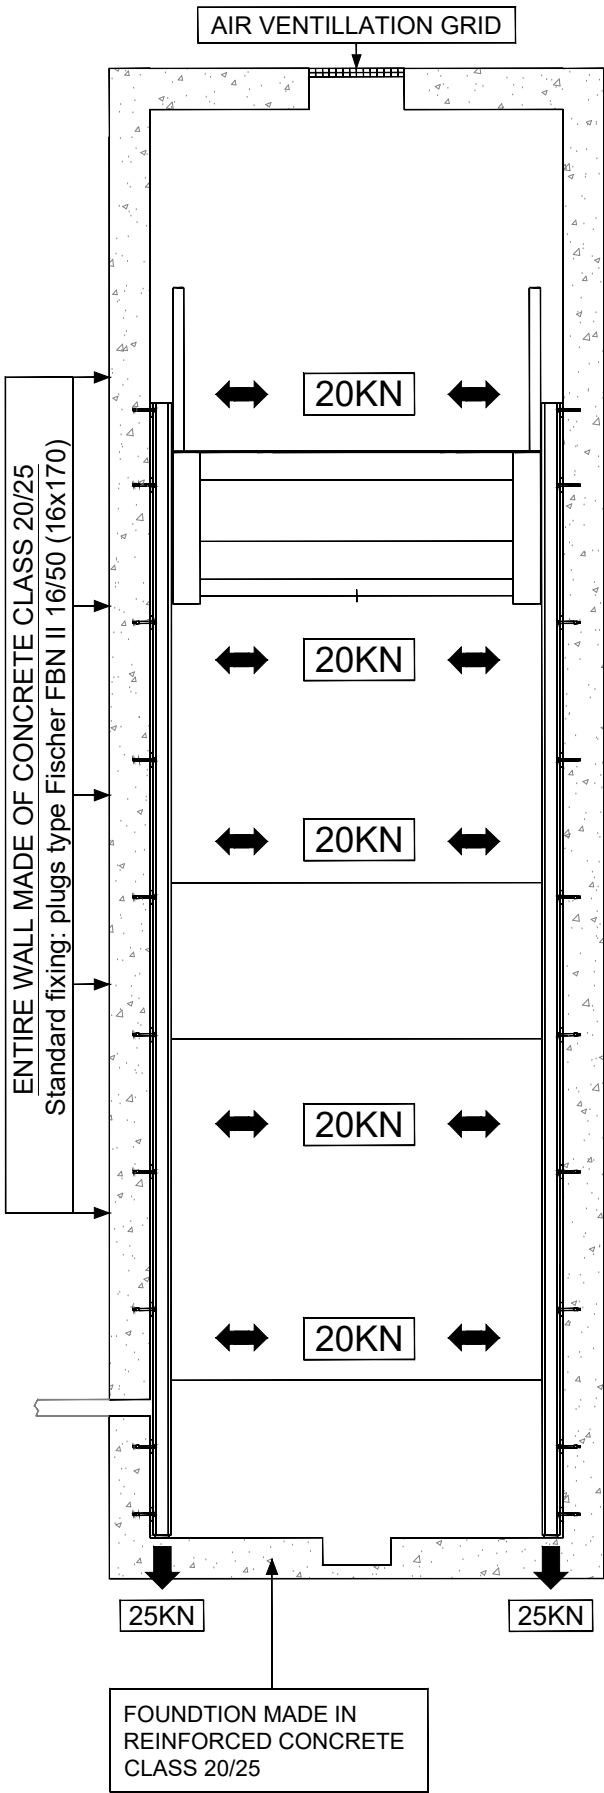

PIT DRAWINGS

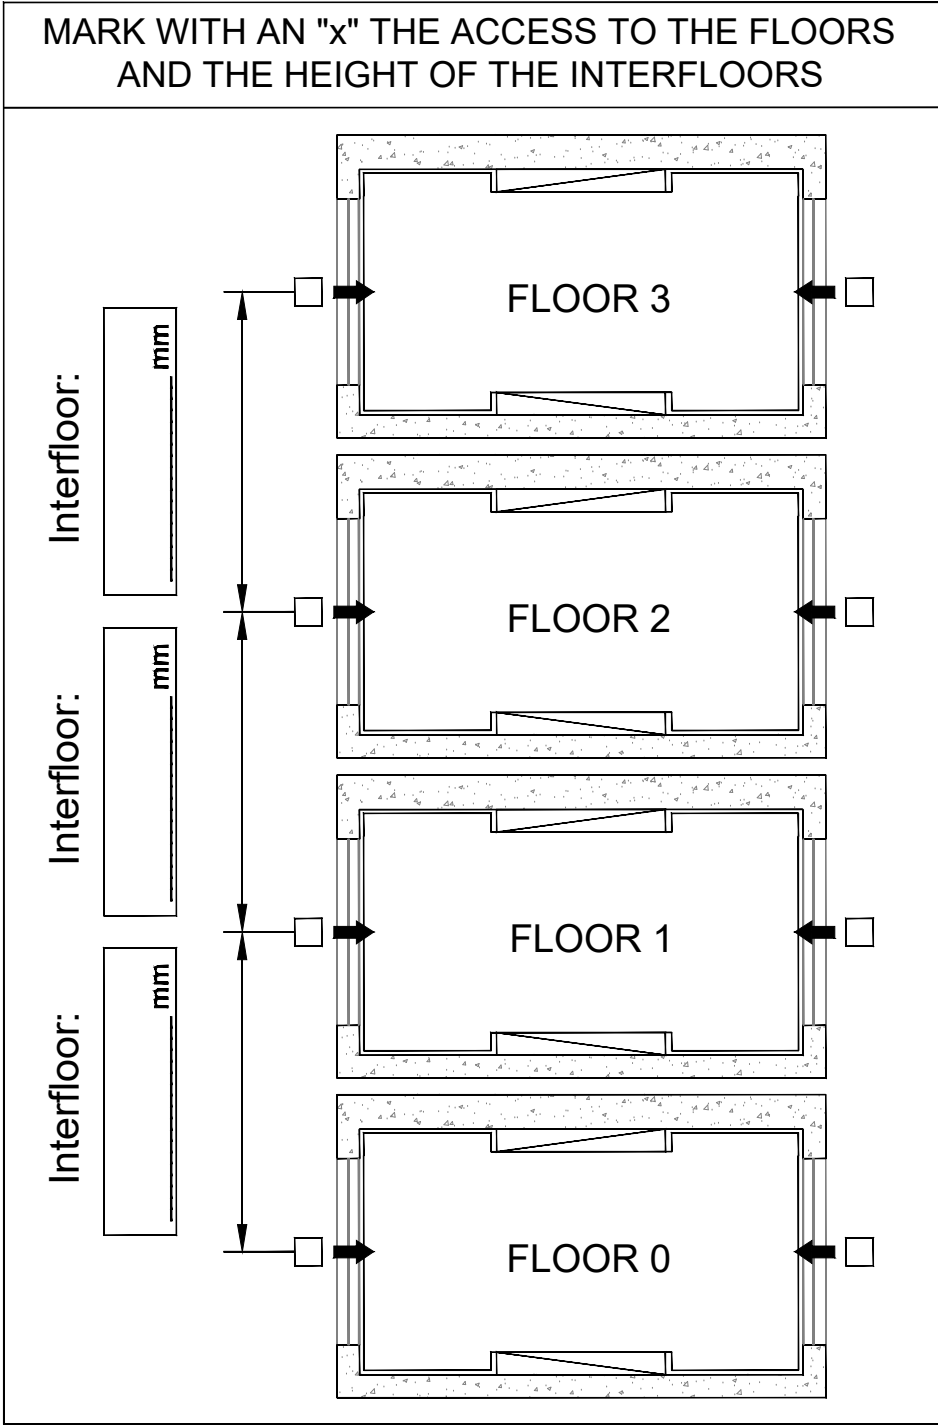

PREPARE A LINE PH+N+T (GND) or 3PH+N+E ,PROVIDE AUTOMATIC MAGNETOTHERMIC BREAKER CURVE "C" WITH DIFFERENTIAL , Id = 0.3A						
Motor	Tension-functioning	Speed CM / sec	Starter	Suggested switch*	Rated current	Current starter
5,5kW	380 V - 3Ph	8,4	Direct	4x16A id=0,3A	11	35
7,5kW	380 V - 3Ph	10,5	Direct	4x16A id=0,3A	14,5	45
9,2kW	380 V - 3Ph	12,4	Direct	4x20A id=0,3A	18	56

NOTE: ANY REDUCTION OF THE SPACE BETWEEN THE PLATFORM AND THE THRESHOLD IS AT THE EXPENCE OF THE CUSTOMER, ANY COMPENSATION MUST INCLUDE A SMOOTH EDGE OF 45° INSIDE THE SHAFT

IMPORTANT: IN MOUNTING THE DOORS CONSULT THE INSTALLATION MANUAL, MAX 10cm FROM THE SHAFT

DIMENSIONS in mm

REVISIONS:			
No.	REVISION DESCRIPTION	DATE	DATE
B	REVISED	DDC	18/12/24
A	ISSUED FOR APPROVAL	DDC	17/12/24

COPYRIGHT
THIS DRAWING IS COPYRIGHT AND THE PROPERTY OF THE AUTHOR IT MUST NOT BE RETAINED, COPIED OR USED WITHOUT THE AUTHORITY OF THE AUTHOR.
DISCLAIMER
THIS DRAWING AND ITS CONTENTS ARE ELECTRONICALLY GENERATED, ARE CONFIDENTIAL AND MAY ONLY BE USED FOR THE PURPOSE FOR WHICH THEY WERE INTENDED. THE AUTHOR WILL NOT ACCEPT RESPONSIBILITY FOR ANY CONSEQUENCES ARISING FROM THE USE OF THE DRAWING FOR OTHER THAN ITS INTENDED PURPOSE OR WHERE THE DRAWING HAS BEEN ALTERED, AMENDED OR CHANGED EITHER MANUALLY OR ELECTRONICALLY BY ANY THIRD PARTY.
NOTE
THIS IS AN UNCONTROLLED DOCUMENT ISSUED FOR INFORMATION PURPOSES ONLY, UNLESS THE CHECKED SECTIONS ARE SIGNED OR COMPLETED. FIGURED DIMENSIONS TAKE PRECEDENCE OVER SCALED. DO NOT SCALE REDUCED SIZE DRAWINGS. VERIFY DIMENSIONS PRIOR TO COMMENCING ANY ON-SITE OR OFF-SITE WORKS OR FABRICATION. IF IN DOUBT - ASK.

HLS
Equipment



PROJECT TITLE		PROJECT LEADER		SIGNATURE:	
HLS - TAV - DL4SPB - 02		A.SHARPE		DATE: NOVEMBER 2025	
DRAWING TITLE		DESIGNER:		SHEET SIZE: A3	
NOT TO SCALE		JOB No.:		REVISION: B	