

# TWO & FOUR COLUMN GOODS LIFT

## TECHNICAL SPECIFICATION






## DL2 & DL4 MODELS TECHNICAL SPECIFICATION

The DL is a range of Hydraulic lifting systems with 2 and/or 4 columns certified for the transport of goods only and/or operator on board (attended), with a total capacity from 300Kgs up to 5000Kgs. The goods-only lift optimizes the loading surface for the material only and is suitable for connecting multiple levels, possible of reaching capacities up to 5000Kg or higher. The DL SPB with operator on board (attended) allows the operator to maneuver the system on board in complete safety. Moreover, the extremely robust platform is suitable for the transit and transport of a forklift accompanied by the operator.


### SPECIFICATION TABLE

	Capacity	Max Travel Distance	Max. Depth	Max. Width	Pit	Min H/room	Max. No. Stops	Power	Standard Motor (KW)
DL2	3,000 kg	16,000mm	2,500mm	4,500mm	260mm	2,150mm	5	Three phase	4
DL4	4,000 kg / 5,000 kg	16,000mm	3,000mm	6,000mm	1,150mm	2,150mm	5	Three phase	5,5

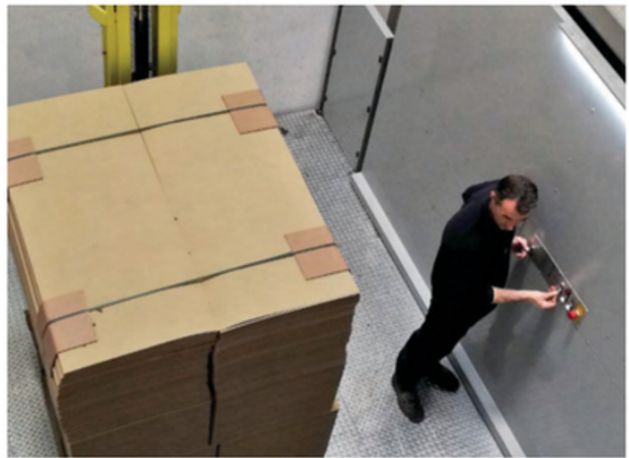

For enquiries please contact us at [info@hlsequipment.com](mailto:info@hlsequipment.com)




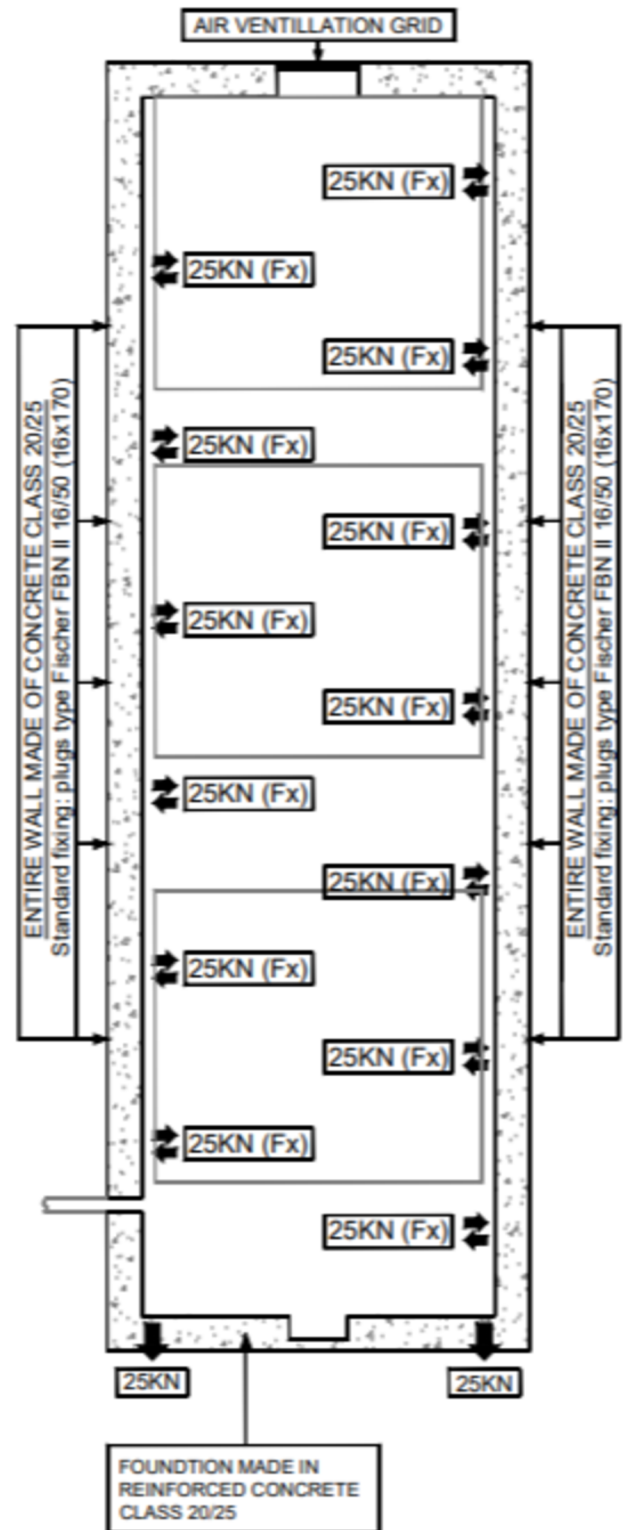



# DL4SPB Person-On-Board Model

## Lift Layout

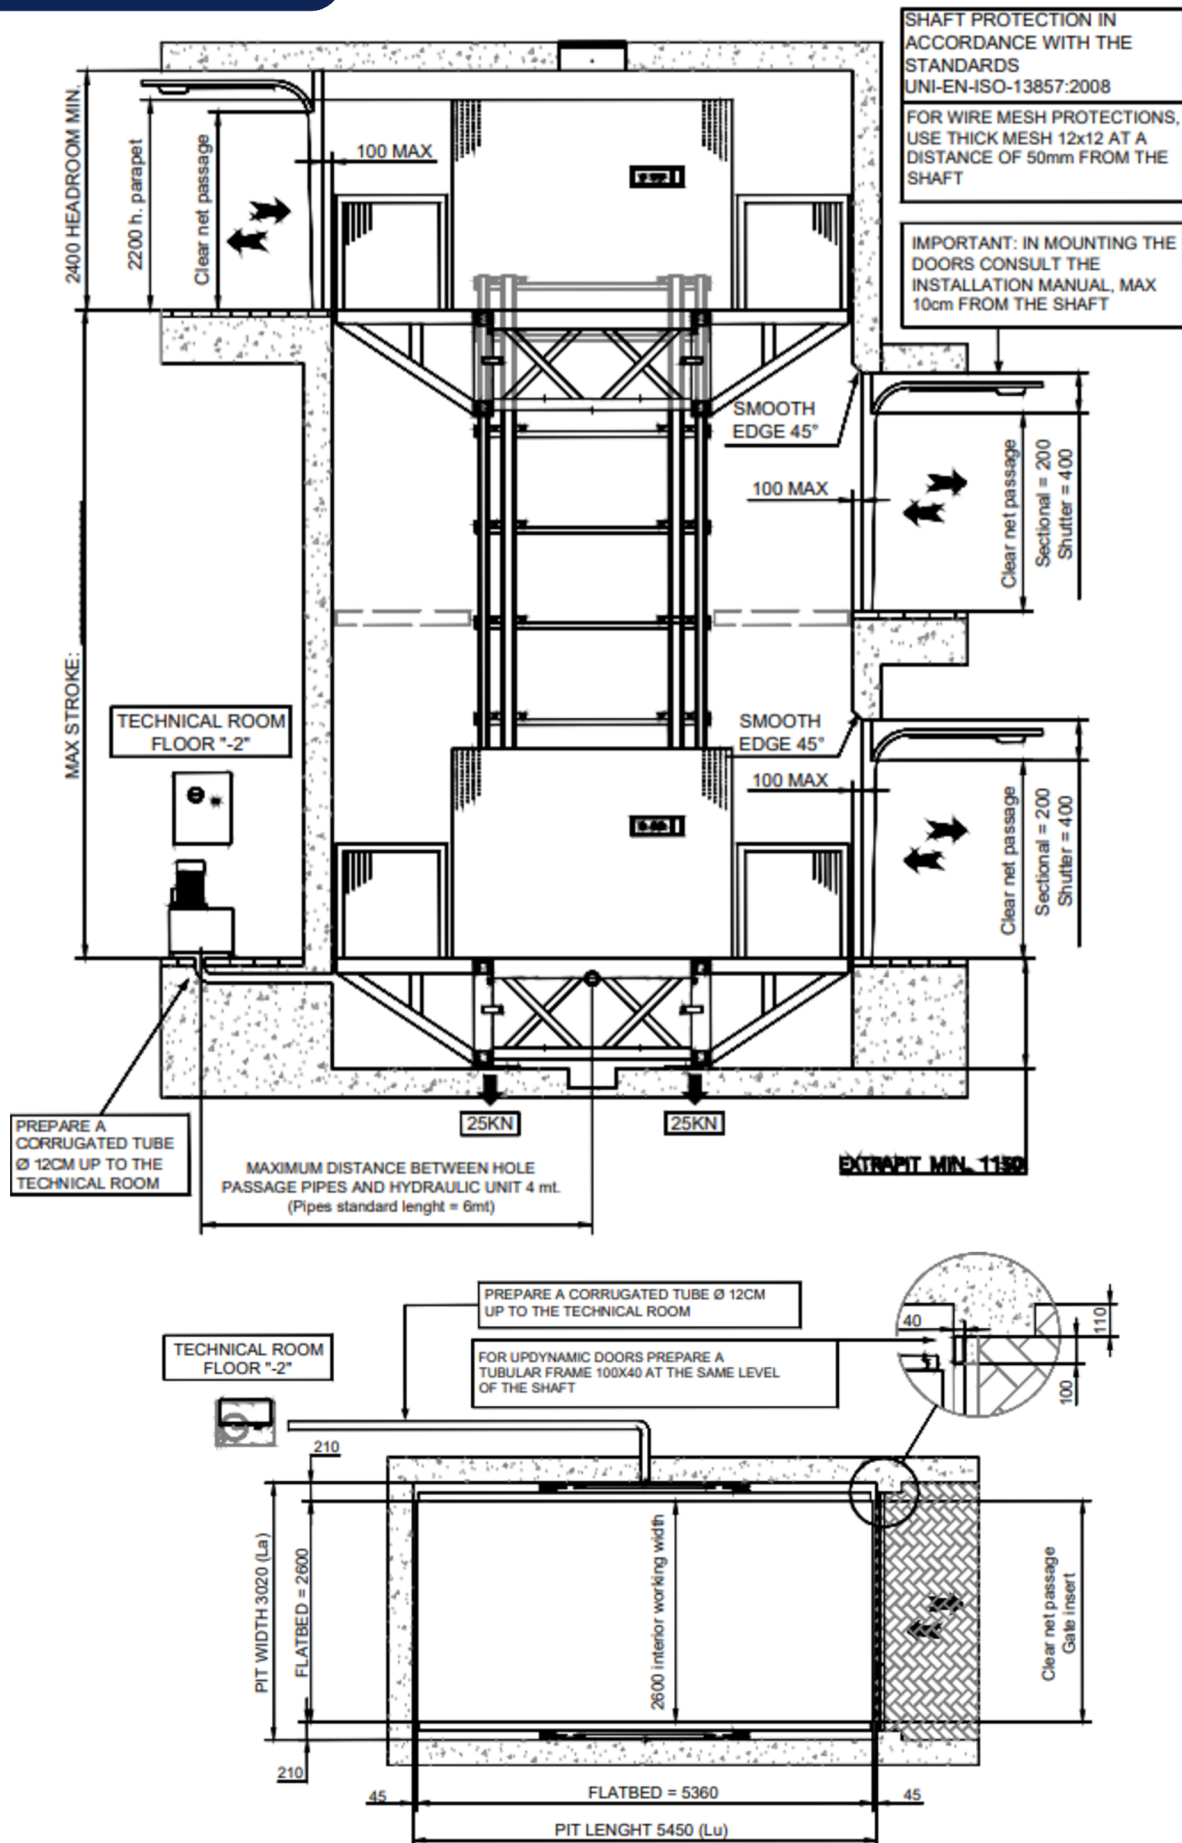

For enquiries please contact us at [info@hlsequipment.com](mailto:info@hlsequipment.com)



## 2 & 4 COLUMN GOODS LIFTS



**Designed for Australian site conditions**



**Engineered & Manufactured in Europe**

Product of **UP** DINAMIC

For enquiries please contact us at [info@hlsequipment.com](mailto:info@hlsequipment.com)