

REX PF LIFT

TECHNICAL SPECIFICATION



TECHNICAL SPECIFICATION REX PF



The Rex PF Lift is a versatile platform for parking or moving motor vehicles to another level serving up to 3.5 meters. It can accommodate heavy vehicles with a capacity up to 3,000kg. The platform comprises a series of galvanised panels that are low profile and light weight while maintaining utmost reliability.

Safety features include "Dead man present" push button boards with keys on both levels, front and rear wheel stops which ensures correct positioning of the vehicle from the front edge and preventing any abrupt forward movement of the vehicle while the platform is in motion.

SPECIFICATION TABLE

	Capacity	Standard Lifting Height	Max Lifting Height	Standard Platform	Pit	Power	Speed	Power supply
REX PF 2347	3,000 kg	3,500mm	3,500mm	2,300mm x 4,700mm	516mm	4 kw	0,08 m/s	415 v / 50 Hz
REX PF 2852	3,000 kg	3,500mm	3,500mm	2,850mm x 5,200mm	516mm	4 kw	0,08 m/s	415 v / 50 Hz
REX PF 3056	3,000 kg	3,500mm	3,500mm	3,000mm x 5,600mm	516mm	4 kw	0,08 m/s	415 v / 50 Hz

REX PF LIFT

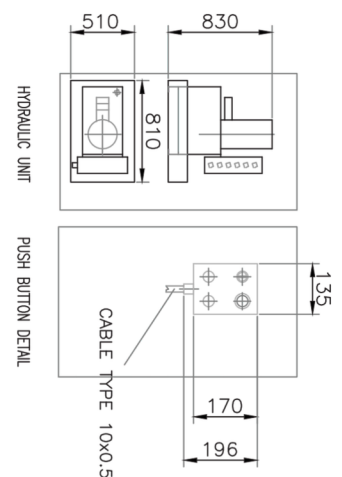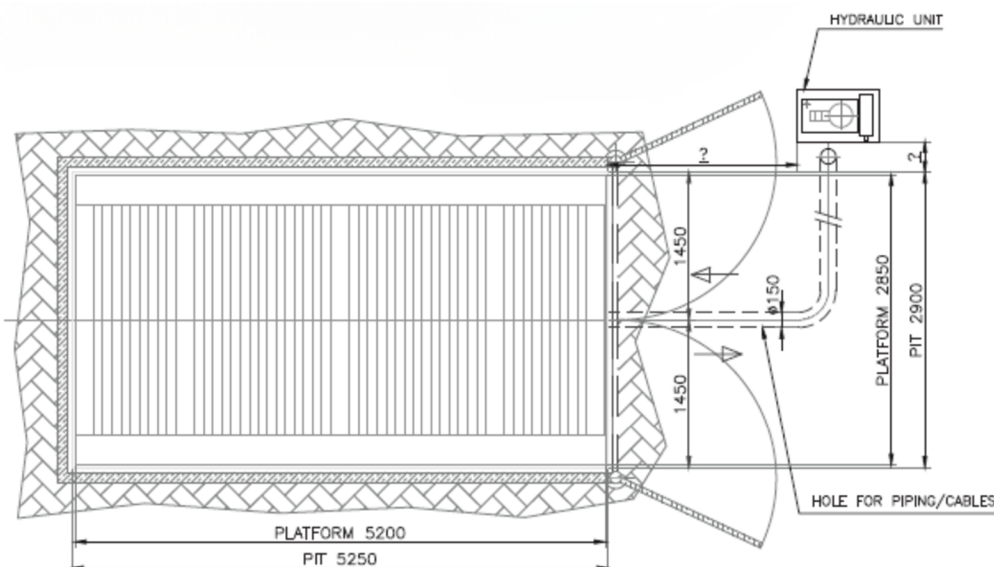

For enquiries please contact us at info@hlsequipment.com

REX PF LIFT



Designed for Australian site conditions



Engineered & Manufactured in Europe

COMPLIANCE DATA

REX PF LIFT SYSTEMS CONFORM TO

- AS 3000
- AS Part 1601
- ISO 9001
- AS 60204
- AS1217.1
- EN14010

Product of



For enquiries please contact us at info@hlsequipment.com